

JUKI



○ **MF-7900 Series**

High-speed, Cylinder-bed, Top & Bottom Coverstitch Machine

○ **MF-7900D Series**

Semi-dry-head, Cylinder-bed, Top & Bottom Coverstitch Machine



MF-7923D-U11-B56

○ **MF-7900** Series

○ **MF-7900D** Series

The MF-7900 Series is a newly developed coverstitch machine provided with lots of mechanisms for improving the seam quality.

It is provided with many different sewing-related mechanisms which contribute to improved seam quality, such as the new feed mechanism, and differential-feed micro-adjustment mechanism. In addition, the machine is provided as standard with a looper thread twining prevention mechanism for improved maintenance.

MF-7900 Series

High-speed, Cylinder-bed, Top & Bottom Coverstitch Machine

MF-7900/UT Series

Direct-drive, High-speed, Cylinder-bed, Top & Bottom Coverstitch Machine with Needle- and Looper- Thread Trimmer

MF-7900D Series

Semi-dry-head, Cylinder-bed, Top & Bottom Coverstitch Machine

MF-7900D/UT Series


Semi-dry-head, Direct-drive, Cylinder-bed, Top & Bottom Coverstitch Machine with Needle- and Looper- Thread Trimmer



Seam quality is improved!!

Thanks to the new feed mechanism, many different types of sewing are achieved.

The feed locus can be adjusted externally. The feed locus is now adjustable in terms of the vertical direction and horizontal direction, thereby improving responsiveness to sewing materials.

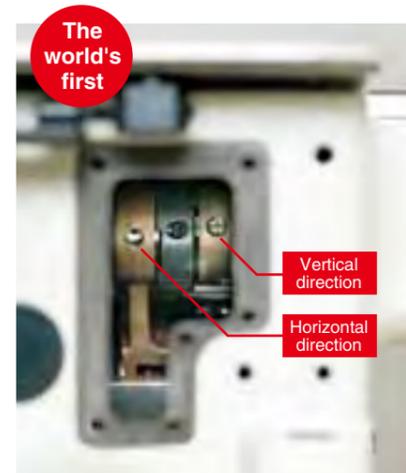

Micro-lifter mechanism



Elastic material or delicate material can be sewn with the presser foot kept slightly raised. This effectively helps reduce the degree of slippage, warpage and damage of the material.



Differential-feed micro-adjustment mechanism

It is possible to finely adjust the differential feed amount to a best-suited value for the material to be used.

The differential feed ratio is constant even if the stitch length is changed.

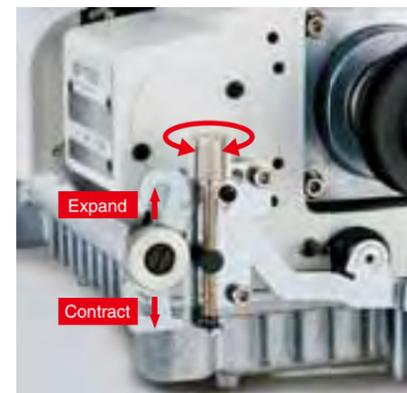

JUKI's dry-head technology protects sewing products from being stained with oil.


With the excellent functions inherited from the MF-7900 Series, the MF-7900D is provided with a dry frame mechanism to eliminate the cause of oil stains. Stain removing work or re-sewing work is substantially reduced by protecting sewing products from being stained with oil, thereby improving the quality of finished products.

The frame no longer requires oiling.
Unlike the conventional models, the oiling mechanism inside the frame has been eliminated. As a result, oil does not leak from the needle bar, presser bar or spreader shaft.

DRY Dry-head technology has materialized a frame which does not need oiling.
The needle bar mechanism and spreader mechanism have been applied with a special surface treatment. JUKI's unique special grease is used for lubrication. Grease-filled bearings have been adopted for the crank rod. These allow the machine's frame mechanism to demonstrate outstanding durability without being oiled.

Environmental consciousness
Since oil stains on sewing products are reduced, the quantity of the use of stain remover generally used in sewing plants can be reduced.

*Dichlorofluoroethane (HCFC-141), which is generally used in oil stain cleaning fluid, is included in those chemicals which need to be reduced, as it is a substance that can harm the ozone layer.

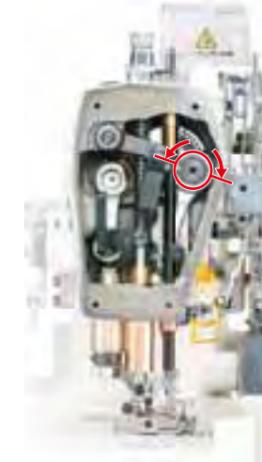

A semi-dry head type sewing machine has been added.

Needle bar stroke conversion mechanism

By changing over the needle bar stroke, penetrating force of the needle as well as thread tension to fit heavy-weight materials (fleece, blankets) can be obtained. The needle bar stroke can be changed by adjusting the eccentric pin. (Changing of parts is not required. Factory-set at the time of delivery: 31mm; for sewing heavy-weight materials: 33mm)



The semi-dry head sewing machine increases its sewing speed to **5,000 sti/min**

Simplified maintenance mechanism

The looper thread twining prevention mechanism has been improved and is provided as standard for the sewing machine.

In the case of looper thread breakage, the looper thread twining prevention mechanism is activated to trim the looper thread before the thread twines on the looper thread cam. In this way, the looper thread twining prevention mechanism prevents the looper thread from twining on the looper thread cam. In addition, the looper thread cam, which has been incorporated in the sewing machine, has been changed so that it is mounted outside of the sewing machine. The externally-mounted looper thread cam promises improved maintainability.




The world's first

Commercially-available gauge components are applicable with no additional work.

As a result of the commonality of components, commercially-available components (presser foot, throat plate and needle clamp) are now applicable and easily obtainable.

All of the sewing machines with a thread trimmer are provided with a direct-drive motor.

The direct-drive motor system has been adopted by all of the sewing machines with a thread trimmer. As a result, the sewing machine starts up swiftly and promises increased stop accuracy, thereby demonstrating improved responsiveness. In addition, the machine is no longer provided with a V-belt. This means that the adoption of the direct-drive motor is also effective in the elimination of belt shavings. Power is directly transmitted from the motor to the sewing machine, thereby contributing to reduced power consumption. (This sewing machine reduces power consumption by 27% as compared with the conventional models.)

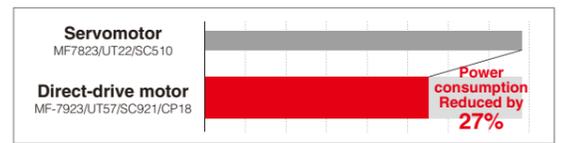

U11 Universal type (basic type)



The machine can be used for the hemming process of the sleeves and bottoms of T-shirts and for the covering process for sportswear and knitwear. The front cover is trimmed to allow operators to bring their hands closer near the needle entry area, thereby increasing work efficiency in the covering process, etc.



Binder mounting base
Various binders can be installed by loading the binder mounting base supplied with the unit.



List of subclass machines

Application	Seam	Model No.	Number of needles	Number of threads	Needle gauge (mm)	Stitch length *1 (mm)	Differential feed ratio *2	Presser foot lifting amount *3 (mm)	Max. sewing speed (sti/min) *4
MF-7900/U11 Universal type (basic type)		MF-7922-U11-B**	2	4	3,2,4,0,4,8	0.9-3.6	1:0.9-1:1.8 (1:0.6-1:1.1)	5 (8)	6,500
		MF-7923-U11-B**	3	5	5,6,6,4				5,000
		MF-7923-U11-B**/PL12, PL13	2	4	4,8				6,000
		MF-7922-U11-B48/UT51	3	5	5,6,6,4				6,000
		MF-7923-U11-B**/UT51, UT53, UT57	3	5	5,6,6,4				5,000
		MF-7923-U11-B**/UT59							
MF-7900D/U11 Universal type (basic type)		MF-7922D-U11-B40	2	4	4,0	0.9-3.6	1:0.9-1:1.8 (1:0.6-1:1.1)	5 (8)	5,000
		MF-7923D-U11-B**	3	5	5,6,6,4				
		MF-7923D-U11-B**/UT51, UT57							
		MF-7923D-U11-B**/UT59							
MF-7923D-U11-B**/UT57/PL12									

*1 Stitch length can be adjusted to 4.5mm at the maximum. *2 Differential ratio can be switched by adjustment. *3 The lift of the presser foot is 5mm for the top and bottom coverstitch machine, and 8mm for the bottom coverstitch machine. *4 "sti/min" stands for "Stitches per Minute."

H22, H23 For hemming (with left hand fabric trimmer)



This model is best suited to hemming processes for sleeves and the bottoms of T-shirts, Polo shirts, etc. It comes with a left hand fabric trimmer for trimming fabric in parallel, at all times, to the seam with consistency. The upper knife stroke can be adjusted with ease.



★:The world's fastest sewing machine with left hand fabric trimmer

List of subclass machines

Application	Seam	Model No.	Number of needles	Number of threads	Needle gauge (mm)	Stitch length *1 (mm)	Differential feed ratio *2	Presser foot lifting amount *3 (mm)	Max. sewing speed (sti/min) *4
MF-7900/H22,23 For hemming (with left hand fabric trimmer)		MF-7922-H22, H23-B**	2	4	4,0,4,8	0.9-3.6	1:0.9-1:1.8 (1:0.6-1:1.1)	5 (8)	6,000 *
		MF-7922-H22, H23-B48/MC40			4,8				
		MF-7923-H22, H23-B**	3	5	5,6,6,4	0.9-3.6	1:0.9-1:1.8 (1:0.6-1:1.1)	5 (8)	6,000 *
		MF-7923-H22, H23-B**/MC40			4,0				
		MF-7922-H22, H23-B48/UT51, UT57	2	4	4,8	0.9-3.6	1:0.9-1:1.8 (1:0.6-1:1.1)	5 (8)	6,000 *
		MF-7922-H22, H23-B48/UT57/MC37			4,0				
MF-7922-H23-D40/UT59/MC37									
MF-7900D/H22,23 For hemming (with left hand fabric trimmer)		MF-7923D-H22, H23-B**/UT51, UT57, UT59	3	5	5,6,6,4	0.9-3.6	1:0.9-1:1.8 (1:0.6-1:1.1)	5 (8)	5,000
		MF-7923D-H22, H23-B**/UT57/MC37			4,8				
		MF-7923D-H22, H23-B**/UT59/MC37	2	4	4,0	0.9-3.6	1:0.9-1:1.8 (1:0.6-1:1.1)	5 (8)	5,000
		MF-7922D-H22, H23-B48/UT57/MC37			4,0				
		MF-7922D-H23-D40/UT57, UT59/MC37							
		MF-7923D-H22, H23-B56	3	5	5,6,6,4	0.9-3.6	1:0.9-1:1.8 (1:0.6-1:1.1)	5 (8)	5,000
MF-7923D-H22, H23-B56/MC40	4,8								
MF-7922D-H22, H23-B48/UT57/MC37	2	4	4,0	0.9-3.6	1:0.9-1:1.8 (1:0.6-1:1.1)	5 (8)	5,000		
MF-7922D-H22, H23-D40/UT57/MC37			4,0						
MF-7922D-H23-D40/UT57, UT59/MC37									
MF-7923D-H22, H23-B**/UT51, UT57	3	5	5,6,6,4	0.9-3.6	1:0.9-1:1.8 (1:0.6-1:1.1)	5 (8)	5,000		
MF-7923D-H22, H23-B**/UT57/MC37			4,8						
MF-7923D-H22, H23-B**/UT59/MC37									

*1 Stitch length can be adjusted to 4.5mm at the maximum. *2 Differential ratio can be switched by adjustment. *3 The lift of the presser foot is 5mm for the top and bottom coverstitch machine, and 8mm for the bottom coverstitch machine. *4 "sti/min" stands for "Stitches per Minute."

H11 For elastic band welting H11 with PL



This model is best suited to elastic-band welting for swimwear, briefs, etc. It welts the elastic band which has been overlapped on the garment body.



List of subclass machines

Application	Seam	Model No.	Number of needles	Number of threads	Needle gauge (mm)	Stitch length *1 (mm)	Differential feed ratio *2	Presser foot lifting amount *3 (mm)	Max. sewing speed (sti/min) *4
MF-7900/H11 Elastic band welting		MF-7923-H11-B**/PL12	3	5	5,6,6,4	0.9-3.6	1:0.9-1:1.8 (1:0.6-1:1.1)	5 (8)	5,000
MF-7923-H11-B**/PL13									
MF-7923-H11-B**/UT52, UT57/PL12									
MF-7923-H11-B**/UT57/PL13									
MF-7900D/H11 Elastic band welting		MF-7923D-H11-B**/UT57/PL13							

*1 Stitch length can be adjusted to 4.5mm at the maximum. *2 Differential ratio can be switched by adjustment. *3 The numeric value indicates the lifting amount of the presser foot for top and bottom coverstitch. The numeric value given in parentheses indicates the lifting amount of the presser foot for bottom coverstitch. *4 "sti/min" stands for "Stitches per Minute."

H24 For hemming (with left hand fabric trimmer, for extra light-weight materials) H25 For hemming (with left hand fabric trimmer and sliding presser foot, for extra light-weight materials)



The machine is best-suited for the hemming of stretchy new material such as T-shirts, underwear and sportswear, etc. The machine produces seams with no semi-cylindrical swells by performing sewing while making the feeding lengths of the right and left needle threads equal. The sliding presser foot prevents the material hem from twisting during sewing and further eliminates oblique-feeding of the material in terms of its texture.



List of subclass machines

Application	Seam	Model No.	Number of needles	Number of threads	Needle gauge (mm)	Stitch length *1 (mm)	Differential feed ratio *2	Presser foot lifting amount *3 (mm)	Max. sewing speed (sti/min) *4
MF-7900D/H24,25 For hemming (with left hand fabric trimmer, for extra light-weight materials)		MF-7922D-H24, H25-E**/UT57,UT59/MC37	2	5	3,2,4,0	0.9-3.6	1:0.9-1:1.8 (1:0.6-1:1.1)	5 (8)	5,000
		MF-7923D-H24, H25-E**/UT57,UT59/MC37	3	5	5,6,6,4				

*1 Stitch length can be adjusted to 4.5mm at the maximum. *2 Differential ratio can be switched by adjustment. *3 The lift of the presser foot is 5mm for the top and bottom coverstitch machine, and 8mm for the bottom coverstitch machine. *4 Sliding presser foot with H25 "sti/min" stands for "Stitches per Minute."

E11

For elastic band attaching
(with right hand fabric trimmer and tension roller)



Briefs



Boxer briefs



MF-7913-E11-B56/PL12/MC37

This model is best suited to endless flat elastic band sewing processes for briefs, boxer briefs, etc. The right hand fabric trimmer trims the fabric, even at a multi-layered joined part, to produce a beautiful finish with the seam and fabric edge aligned with consistency. Cloth cutting knife can be detached with one touch operation in case of sewing without using the knife.



List of subclass machines

Application	Seam	Model No.	Number of needles	Number of threads	Needle gauge (mm)	Stitch length *1 (mm)	Differential feed ratio *2	Presser foot lifting amount *3 (mm)	Max. sewing speed (sti/min) *4
MF-7900/E11 Elastic band attaching (with right hand fabric trimmer)		MF-7922-E11-B40/PL12/MC40	2	4	4.0	0.9~3.6	1:0.9~1:1.8 (1:0.6~1:1.1)	5 (7)	5,000
		MF-7923-E11-B**/PL12/MC40	3	5	5.6,6.4				
		MF-7923-E11-B**/PL13/MC40		4	5.6				
MF-7913-E11-B56/UT55,UT56/PL12/MC37	3	MF-7913-E11-B56/UT55/PL13/MC37	4	5.6,6.4					
MF-7913-E11-B56/UT56/PL13/MC37		4	5.6,6.4						
MF-7900D/E11 Elastic band attaching (with right hand fabric trimmer)		MF-7913D-E11-B56/UT56/PL13/MC37	3	4	5.6	0.9~3.6	1:0.9~1:1.8 (1:0.6~1:1.1)	5 (7)	5,000

*1 Stitch length can be adjusted to 4.5mm at the maximum. *2 Differential ratio can be switched by adjustment.
*3 The numeric value indicates the lifting amount of the presser foot for top and bottom coverstitch. The numeric value given in parentheses indicates the lifting amount of the presser foot for bottom coverstitch.
*4 "sti/min" stands for "Stitches per Minute."

E22

For endless spandex elastic band attaching
(with manual binder and tension roller)

E23

For endless spandex elastic band attaching
(with air binder and tension roller)



Briefs



MF-7923-E22-B56/PL13



MF-7923-E23-B56/PL13

This model is best suited for sewing elastic bands on briefs. E22 is opened / closed with the knee lever and E23 is opened / closed with the knee switch. The machine comes provided as standard with a tension roller to smoothly sew elastic bands on different-sized garment bodies. The machine flexibly adapts to varying elasticities due to its soft seams.



List of subclass machines

Application	Seam	Model No.	Number of needles	Number of threads	Needle gauge (mm)	Stitch length *1 (mm)	Differential feed ratio *2	Presser foot lifting amount *3 (mm)	Max. sewing speed (sti/min) *4
MF-7900/E22,23 For endless spandex elastic band attaching		MF-7923-E22-B**/PL13 MF-7923-E23-B**/PL13 MF-7923-E22-B**/UT52/PL13 MF-7923-E23-B**/UT57/PL13	3	5	5.6,6.4	0.9~3.6	1:0.9~1:1.8 (1:0.6~1:1.1)	6 (7)	5,000

*1 Stitch length can be adjusted to 4.5mm at the maximum. *2 Differential ratio can be switched by adjustment.
*3 The numeric value indicates the lifting amount of the presser foot for top and bottom coverstitch. The numeric value given in parentheses indicates the lifting amount of the presser foot for bottom coverstitch.
*4 "sti/min" stands for "Stitches per Minute."

Device

UT51

Electromagnetic needle thread / looper thread trimming device / Auto-lifter

It is an electromagnetic needle thread / looper thread trimming device / Auto-lifter. The machine does not need an air compressor to achieve easy layout changing.



Electromagnetic needle thread / looper thread trimming device



1 Presser lifter drive mechanism magnet
2 Thread trimmer drive mechanism magnet

UT52

Electromagnetic needle thread / looper thread trimming device / Auto-lifter

It is an electromagnetic needle thread / looper thread trimming device / Auto-lifter with cloth puller.



Electromagnetic needle thread / looper thread trimming device



1 Presser lifter drive mechanism magnet
2 Thread trimmer drive mechanism magnet

UT53

Electromagnetic type bottom thread trimming device + Electromagnetic type wiper / Auto-lifter

This is an electromagnetic type bottom thread trimming device / auto-lifter. It is used for processes which do not need top covering.



UT55

Pneumatic type bottom thread trimming device + Electromagnetic type wiper / Auto-lifter

This is a pneumatic type bottom thread trimming device / auto-lifter. It is used for processes which do not need top covering.

UT56

Pneumatic type bottom thread trimming device + Air blow type wiper / Auto-lifter

This is a pneumatic type bottom thread trimming device / auto-lifter. It pneumatically handles the needle thread (i.e. places the needle thread above the presser foot) instead of the mechanical wiper.


UT57

Pneumatic type needle thread / looper thread trimming device / Auto-lifter

It is a pneumatic type needle thread / looper thread trimming device / Auto-lifter. Since the automatic lift of the presser foot and automatic thread trimming can be activated by lightly depressing the pedal, work efficiency is dramatically increased. The air blow type wiper is supplied with the sewing machine as an accessory.



Pneumatic type needle thread / looper thread trimming device

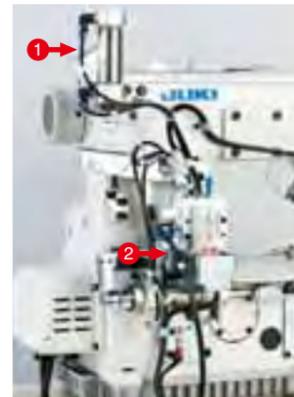

1 Presser lifter drive mechanism air cylinder
2 Thread trimmer drive mechanism air cylinder

UT59

UT59 cannot be attached to the machine as a device. Please order with the machine head.

Pneumatic type top and bottom thread trimming device with thread-fray-prevention function

It is the state-of-the-art function to make the thread-fray-prevention at the end of sewing more reliable.



New cloth guide / The new cloth guide helps the machine perform hemming while keeping the hem width consistent.


*When you order UT59, the short stitch device (SS11) is included.

Device

SS11

Short stitch device : Part No.70004376

This is a device for preventing the thread from coming undone at the end of sewing. The device is able to sew condensation stitches by the number specified as desired. It prevents the needle thread from being poorly tensed, which is likely to occur in cases where the amount of condensation is reduced.

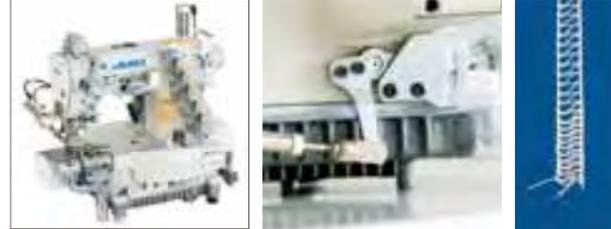

The needle thread tightening mechanism helps produce well-tensed seams even when the machine performs short stitching.

The short stitch pitch can be adjusted with ease.

MC37·MC40

Pneumatic cloth chip suction device

MC37 (solenoid valve type) : Part No.70004432,
MC40 (mechanical valve type) : Part No.70004434

Compressedair / Air consumption (with automatic thread trimmer)

Device	Top and bottom thread trimmer Auto-lifter	Bottom thread trimmer Auto-lifter	Air blow type wiper	MC37 MC40	Air consumption dm ³ /min (ANR)	Compressed air MPa
UT55	—	●	—	●	456	0.5
UT56	—	●	●	—	182	0.5
	—	●	●	●	637	
UT57, UT59	●	—	—	—	0.7	0.5
	●	—	●	—	182	
	●	—	—	●	456	
	●	—	●	●	637	

PL12

Cloth puller : Gear type

This is a gear type cloth puller. It helps feed difficult-to-feed materials to assist smooth sewing.
(Example: Attaching flat elastic bands)



PL13

Cloth puller : Flat type

This is a flat type cloth puller. It helps feed soft material which requires a higher feeding force to assist sewing.
(Example: Hemming)



SPECIFICATIONS (U11, H11, H22, H23, H24, H25, E11, E22, E23)

Model name	MF-7900 series	MF-7900D series
Stitch type	2-needle/3-needle top and bottom covering stitch	2-needle/3-needle top and bottom covering stitch
Needle	UY128GAS (#10S) #9~#12S	
Lift of the presser foot	5mm (with top and bottom covering stitch), 8mm (with bottom covering stitch)	
Stitch pitch adjustment	By dial	
Differential feed adjustment	By micro-adjustment mechanism	
Lubrication	Automatic	Automatic (frame: no lubrication)
Lubricating oil	JUKI Machine Oil 18 (equivalent to ISO VG18)	
Feed dog inclination adjustment	Provided as standard	
Micro-lifter	Provided as standard	
Needle gauge (mm)	3.2, 4.0, 4.8, 5.6, 6.4	
Needle bar stroke converting function	U11, H11, H22, H23, E11 : Provided as standard: 31mm: at the time of delivery / When sewing a heavy-weight material: 33mm	U11, H22, H23, H24, H25, E11 : Provided as standard: 31mm: at the time of delivery / When sewing a heavy-weight material: 33mm
	E22, E23 : Provided as standard: 33mm: at the time of delivery / When sewing a heavy-weight material: 35mm	—
Silicon oil tank for needle tip and needle thread	Provided as standard	
Cartridge oil filter	Provided as standard	
Power requirement / Power consumption	Single-phase 100~120V / 200~240V, 3-phase 200~240V / 500VA (with automatic thread trimmer)	
Weight of the machine head	U11	41kg (without device), 49kg (with UT51), 51kg (with PL/UT52), 44kg (with UT57)
	H11 (with PL)	43kg (without device), 51kg (with UT52), 46kg (with UT57)
	H22, H23	42kg (without device), 50kg (with UT51), 45kg (with UT57)
	H24, H25	— / 46kg (with UT57), 46kg (with UT59)
	E11 (with PL)	44kg (without device), 48kg (with UT55), 47kg (with UT56)
	E22, E23 (with PL)	43kg (without device), 51kg (with UT52), 46kg (with UT57)

JUKI ECO PRODUCTS

The MF-7923U11B56/UT57 is an eco-friendly product which complies with JUKI ECO PRODUCTS standards for protecting the environment.



- This sewing machine reduces power consumption by 27% as compared with the conventional models.
- The sewing machine complies with the "Juki Group Green Procurement Guidelines" on the use of hazardous substances, which is stricter than other restrictions, such as those of the RoHS Directive.

For details of JUKI ECO PRODUCTS, refer to : http://www.juki.co.jp/eco_e/index.html

*The RoHS Directive is an EU Directive limiting the use of 6 hazardous substances (lead, hexavalent chromium, mercury, cadmium, PBB and PBDE) in electrical and electronic equipment.
The Juki Green Procurement Guideline is the voluntarily established criteria to eliminate not only the aforementioned six substances, but also other ones which also adversely affect the environment.

WHEN YOU PLACE ORDERS

Please note when placing orders, that the model name should be written as follows:

MF-7900

Machine head

Without automatic thread trimmer

Stitch type	Code	Tongue shape of throat plate	Code	Needle gauge	Code
2-needle, top and bottom coverstitch	22	B type	B	3.2mm	32
3-needle, top and bottom coverstitch	23			4.0mm	40
				4.8mm	48
				5.6mm	56
				6.4mm	64

*Refer to the subclass models list for the needle gauge of the respective models.

MF79 [] [] [] [] [] [] B [] [] / [] [] [] [] [] []

Application	Code	Device and attachment	Code
Universal type	U11	Not provided	
Elastic band welting	H11	Pneumatic cloth chip suction device (mechanical valve type)	MC40
Hemming (with left hand fabric trimmer, for light-weight materials)	H22	Cloth puller: Gear type	PL12
Hemming (with left hand fabric trimmer, for medium-weight materials)	H23	Cloth puller: Flat type	PL13
For elastic band attaching	E11		
For endless spandex elastic band attaching (with manual binder and tension roller)	E22		
For endless spandex elastic band attaching (with air binder and tension roller)	E23		

With automatic thread trimmer (Direct-drive motor)

Stitch type	Code	Tongue shape of throat plate	Code	Needle gauge	Code
3-needle, bottom coverstitch	13	B type	B	4.0mm	40
2-needle, top and bottom coverstitch	22	D type	D	4.8mm	48
3-needle, top and bottom coverstitch	23			5.6mm	56
				6.4mm	64

*Refer to the subclass models list for the needle gauge of the respective models.

MF79 [] [] [] [] [] [] / [] [] [] [] [] [] / [] [] [] [] [] []

Application	Code	Thread trimming device	Code
Universal type	U11	Electromagnetic type top and bottom thread trimming device	UT51
Elastic band welting	H11	Electromagnetic type top and bottom thread trimming device	UT52
Hemming (with left hand fabric trimmer, for light-weight materials)	H22	Electromagnetic type bottom thread trimming device + Electromagnetic type wiper	UT53
Hemming (with left hand fabric trimmer, for medium-weight materials)	H23	Pneumatic type bottom thread trimming device + Electromagnetic type wiper	UT55
For elastic band attaching	E11	Pneumatic type bottom thread trimming device + Air blow type wiper	UT56
For endless spandex elastic band attaching (with manual binder and tension roller)	E22	Pneumatic type top and bottom thread trimming device	UT57
For endless spandex elastic band attaching (with air binder and tension roller)	E23	Pneumatic type top and bottom thread trimming device with thread-fray-prevention function	UT59
		Pneumatic cloth chip suction device (electromagnetic valve type)	MC37
		Cloth puller: Gear type	PL12
		Cloth puller: Flat type	PL13

Control box

SC-921B

Operation panel

CP-18B

MF-7900D (Semi-dry-head)

Machine head

Without automatic thread trimmer

Stitch type	Code	Tongue shape of throat plate	Code	Needle gauge	Code
2-needle, top and bottom coverstitch	22	B type	B	4.0mm	40
3-needle, top and bottom coverstitch	23			5.6mm	56
				6.4mm	64

*Refer to the subclass models list for the needle gauge of the respective models.

MF79 [] [] [] [] [] [] D [] [] [] [] [] [] B [] [] / [] [] [] [] [] []

Application	Code	Device and attachment	Code
Universal type	U11	Not provided	
Hemming (with left hand fabric trimmer, for light-weight materials)	H22	Pneumatic cloth chip suction device (mechanical valve type)	MC40
Hemming (with left hand fabric trimmer, for medium-weight materials)	H23		

With automatic thread trimmer (Direct-drive motor)

Stitch type	Code	Tongue shape of throat plate	Code	Needle gauge	Code
3-needle, bottom coverstitch	13	B type	B	3.2mm	32
2-needle, top and bottom coverstitch	22	D type	D	4.0mm	40
3-needle, top and bottom coverstitch	23	E type	E	4.8mm	48
				5.6mm	56
				6.4mm	64

*Refer to the subclass models list for the needle gauge of the respective models.

MF79 [] [] [] [] [] [] D [] [] [] [] [] [] / [] [] [] [] [] [] / [] [] [] [] [] []

Application	Code	Thread trimming device	Code
Universal type	U11	Electromagnetic type top and bottom thread trimming device	UT51
Elastic band welting	H11	Pneumatic type bottom thread trimming device + Air blow type wiper	UT56
Hemming (with left hand fabric trimmer, for light-weight materials)	H22	Pneumatic type top and bottom thread trimming device	UT57
Hemming (with left hand fabric trimmer, for medium-weight materials)	H23	Pneumatic type top and bottom thread trimming device with thread-fray-prevention function	UT59
Hemming (with left hand fabric trimmer, for extra light-weight materials)	E22	Pneumatic cloth chip suction device (electromagnetic valve type)	MC37
Hemming (with left hand fabric trimmer and sliding presser foot, for extra light-weight materials)	E23	Cloth puller: Gear type	PL12
For elastic band attaching	E11	Cloth puller: Flat type	PL13

Control box

SC-921B

Operation panel

CP-18B

JUKI
JUKI CORPORATION
SEWING MACHINERY BUSINESS UNIT

2-11-1, TSURUMAKI, TAMA-SHI,
TOKYO 206-8551, JAPAN
PHONE : (81) 42-357-2254
FAX : (81) 42-357-2274
<http://www.juki.com>

- * Specifications and appearance are subject to change without prior notice for improvement.
- * Read the instruction manual before putting the machine into service to ensure safety.
- * This catalogue prints with environment-friendly soyink on recycle paper.



Registered Organization : JUKI CORPORATION Head Office
The Scope of the Registration : The activities of research,
development, design, sales, distribution, and maintenance
services of industrial sewing machines, household sewing
machines and industrial robots, etc., including sales and
maintenance services of data entry systems.

JUKI ITALIA S.p.A.
20020 Lainate MI - Via Bergamo, 4
Tel. 02937579.1 - Fax uffici 0293570164
Fax ricambi 0293571066
<http://www.juki.it> - E-mail: info@juki.it